

# Trench Strut Robust + Standard


All trench struts can also be used as props!

## TYPE ROBUST

- Not fixed spindle with nut, can be used with all sizes
- Single side acting
- Cold rolled thread with high stability
- Head and base plates are bended a little in the corners for safer positioning

Allowed load capacity: 40 - 45 kN

Item	Art. Nr.	Weight
Trench Strut Robust size 1 0,55 - 0,85 m	220 0003	5,5 kg
Trench Strut Robust size 2 0,65 - 0,95 m	220 0004	6,0 kg
Trench Strut Robust size 3 1,00 - 1,30 m	220 0005	7,0 kg
Replacement spindle with plate and nut for trench strut	290 0082	2,6 kg

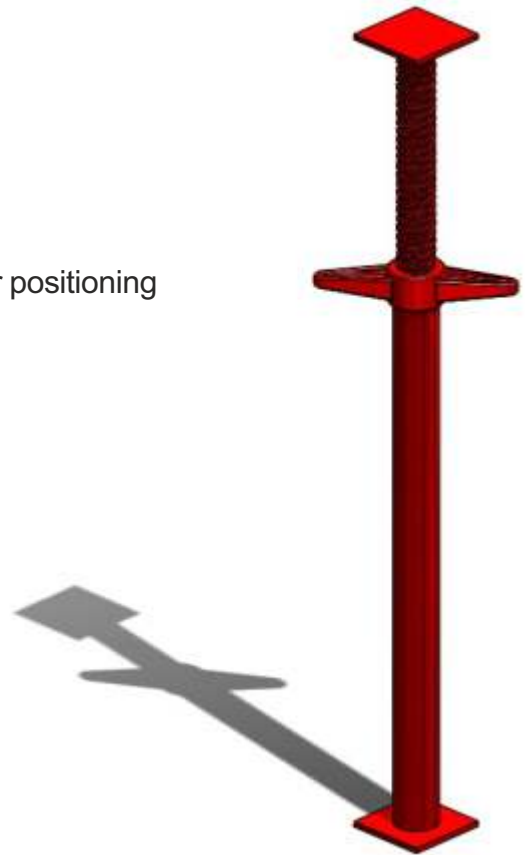

## TYPE STANDARD:

- Closed thread
- Single side acting
- Bigger adjustment range
- Special round thread
- Made from steel tubes:
  - outside tube  $\varnothing 57 / 2,9$  mm
  - inside tube  $\varnothing 48,3 / 3,2$  mm
- Special sizes upon request

Allowed load capacity: 20 - 25 kN

Item	Art. Nr.	Weight
Trench Strut Standard size1 0,60 - 1,00 m	220 0001	7,0 kg
Trench Strut Standard size2 0,90 - 1,50 m	220 0002	9,0 kg



AN 01/16

TECHNIK FÜR DEN BAU